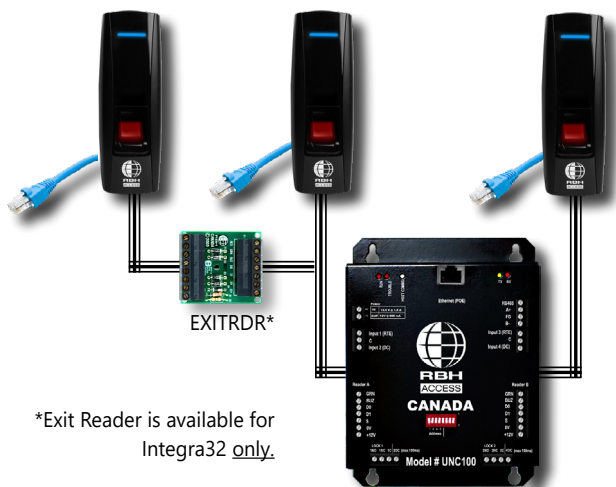# BFR-150x
Fingerprint Readers

The BFR-150 fingerprint reader by RBH is available with a MIFARE smart card reader or 125khz prox reader. Users will benefit from its unparalleled performance, ease-of-use, precision and fast matching speed.

This fingerprint reader features a highly accurate optical sensor with tamper switch, advanced matching algorithm and a three color LED indicator for acceptance and rejection of fingerprints.
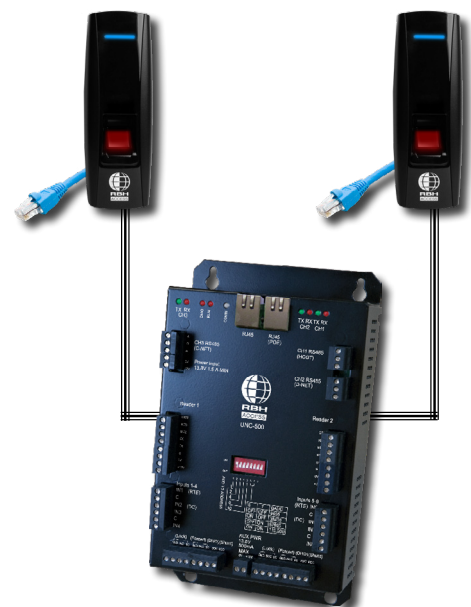
Specifications

	BFR-150S	BFR-150P
Verification Option	Fingerprint / Fingerprint + Card / Card	
Verification Mode	1:1 / 1:N	
Verification Time	Less Than 2.0 Seconds (1:1 Verification Mode)	
Registration Time	Less Than 3.0 Seconds	
Templates	Up to 9,500	
PC to Reader / Panel to Reader	Ethernet TCP / IP Cable / Wiegand (6 Cond. Shielded, Stranded, 18-22 AWG)	
Wiegand Out	1	
Communication Speed	Ethernet 10/100M	
Integrated Reader	MIFARE CSN	125khz AWID
Measurements	160 x 56.9 x 40mm	
Operating Temperature / Humidity	00C - 650 C / 5% - 95% RH	
Rating	IP-54	
Power	DC 9~24 V, 1A	
Certifications	FC CE	*Specifications are subject to change without notice.

EXITRDR*

*Exit Reader is available for Integra32 only.

UNC-100

UNC-500